

Multi

ELECTRIC

RGL

Runway Guard Light

COMPLIANT WITH:

FAA-AC 150/5345-46 L-804
ICAO Annex 14



GENERAL DESCRIPTION

Elevated Runway Guard Light is a light fixture with dual alternating yellow light signals intended to warn a pilot or driver of a ground vehicle that they are about to enter a runway. These light fixtures may be powered from a series circuit or operated from a 120V or 240V 50 or 60 Hz source.

ORDERING INFORMATION

Runway Guard Light

Mode:

- 1) Series Circuit 6.6A 50/60Hz
- 2) 120V AC 50/60Hz
- 3) 220-240 VAC 50/60Hz

Lens:

- YY – Traffic Signal Yellow
(FAA compliant)
- RR – Traffic Signal Red
(not FAA compliant)
- IY – ICAO Yellow
(ICAO Compliant)

Photocell:


- 1 – With Photocell
- 2 – Without Photocell

Monitor:

- 1 – Monitored
- 2 – Without Monitor

Note: Baseplates and bases and series circuit transformers are sold separately

6 8 0 4 - X - X X - X - X

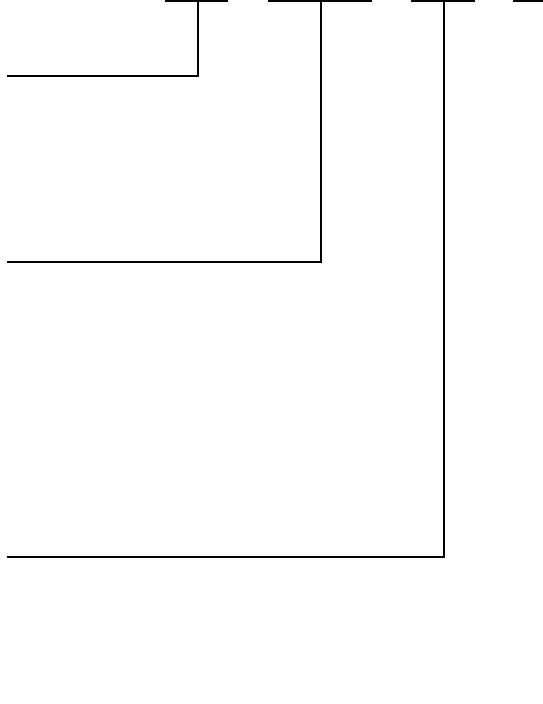

Example:

6804-3-YY-1-1 is an FAA compliant voltage powered fixture with monitoring and photocell

Detailed Specifications:

Parameter	Specification
All Systems	
Operating Temperature	-68°F (-55°C) to +131°F (+ 55°C)
Humidity	0 to 100%
Frangability	1300 ft-Lb (1762 N-m) to 2100 ft-LB (2846 N-m)
Flash Rate	45 to 50 Alternating Flashes per minute
Mounting Height	24.5 to 32 inches
Stray Light Shield	Integral to front panel
Alarms	Dry contact, self-resetting
Monitored	Lamps Out, Flasher Failure, Missed Flash
Optics	
Lenses	Heat Resistant Tempered Glass
Lens Color	US - Traffic Signal Yellow
CIE Color Coordinates	y not less than 0.411 nor less than 0.95 - x nor greater than 0.452.
Vertical Adjustment	0 to +20 Degrees with 1 degree Locking Provision
Horizontal Adjustment	± 20 Degrees with 5 degree Locking Provisions
Lamp	100W PK30 Style 6.6A
Reflector	Parabolic Polished Aluminum
Series Circuit Powered	
Input Power	6.6A 50/60Hz (nominal 130W) 3 Step CCR recommended
Transformer Options	6.6A - 6.6A 200W 50Hz or 60Hz 20 A - 6.6A 200W 50Hz or 60Hz
Voltage Powered	
Input Power	Option 1: Nom. 120VAC 60Hz 2.3 Amps max. Option 2: Nom. 240VAC 60Hz 1.3 Amps max. Option 3: Nom. 220VAC 50Hz 1.3 Amps max.
Line (Mains) Variation	+10% - 10%
Intensity Control	Photocell preset automatic for Day 100% intensity, (50 - 60 ft-cd ambient) Night 30% intensity, (25 - 35 ft-cd ambient)

Multi

ELECTRIC

<http://www.multielectric.com>

4223 W. Lake Street

Chicago, IL 60624

Tel: 773.722.1900 Fax: 773.722.5694

Email: sales@multielectric.com